

AQUApro Supreme 12.0


Product description

P H62

Stand: 10.19



System

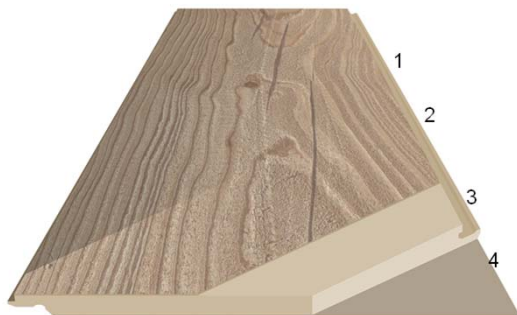


- 1 high-grade durable overlay
- 2 impregnated decorative paper
- 3 Aquatec HDF Substrate with edge sealing
- 4 balancer

Profile



Kaindl Loc Pressed Bevel

profile longitudinal



Kaindl Loc Tap Pressed Bevel

profile transversal

Tests	Flooring Symbols	Results
Panel dimension		1383x192x12mm
Service category per Standard per	EN ISO 10874 EN 13329 	32
Abrasion resistance	EN 13329 	AC4
Impact resistance	small ball big ball EN 13329 	≥12N ≥750mm
Formaldehyde emission of the substrate before coating	EN 120 DIBT-Richtlinie 100 	E1 [Europe]
Formaldehyde emission	EN 717-1	< 0,1 ppm
	EN 717-2	< 3,5 mg/h m ²

All values are approximate values - fluctuations cannot be absolutely ruled out.

Formaldehyde emission/ VOC		GREENGUARD GOLD
Formaldehyde emission	CARB	CARB Phase 2
Edge swelling	EN 13329	≤ 12%
Thermal conductivity	ISO 8302	0,0930 m ² .K/W
Moisture residue HDF	EN 322	4 - 7 %
Resistance to cigarette burns	EN 438-2.18	grade 4
Light fastness	EN ISO 105-B02 EN 20105-A02	not worse than 6 Blue wool scale not worse than 4 Grey scale
Lifting resistance	EN 13329	≥ 1 N/mm ²
Cross tensile strength	EN 319	> 1 N/mm ²
Resistance to stains	EN 438-2.15	groups 1-2 grade 5 group 3 grade 4
Combustibility	EN13501-1	Cfl , s1
Water resistance	NALFA	0,5mm
Sliding friction μ	EN 13893	≥ 0,3
Dimensional variants after changes in relative humidity	EN 13329	length and width ≤ 0,9 mm
Straightness of the panels	EN 13329	≤ 0,30 mm /m
Height difference between elements	EN 13329	maximum ≤ 0,15 mm average ≤ 0,10 mm
Squared elements	EN 13329	≤ 0,2 mm / panel width
Flatness of the element width	EN 13329	concave ≤ 0,3 mm convex ≤ 0,4 mm
Flatness of the element length	EN 13329	concave ≤ 7 mm convex ≤ 14 mm
System pattern matching widthwise		+/- 2mm
Ship's planking matching widthwise		+/- 4mm

1)Information under www.floorsymbols.com